

Спецификация металла на одну деталь


Дет. №	Кол. шт.	Профиль	Длина, мм	ГОСТ или ТУ профиля	Масса, кг	Марка стали	Примечание
1086	1	ДВУТАВР30Ш1	3143	ГОСТ Р 57837-20	178.60	С255-4	Отв.

Ведомость отверстий


Диаметр, мм	Кол-во, шт
19	2
23	3
27	4

Кол-во	В марке
2	2К4-2
1	3К4-2
1	4К4-2
4	Итого, шт.

Вид сверху

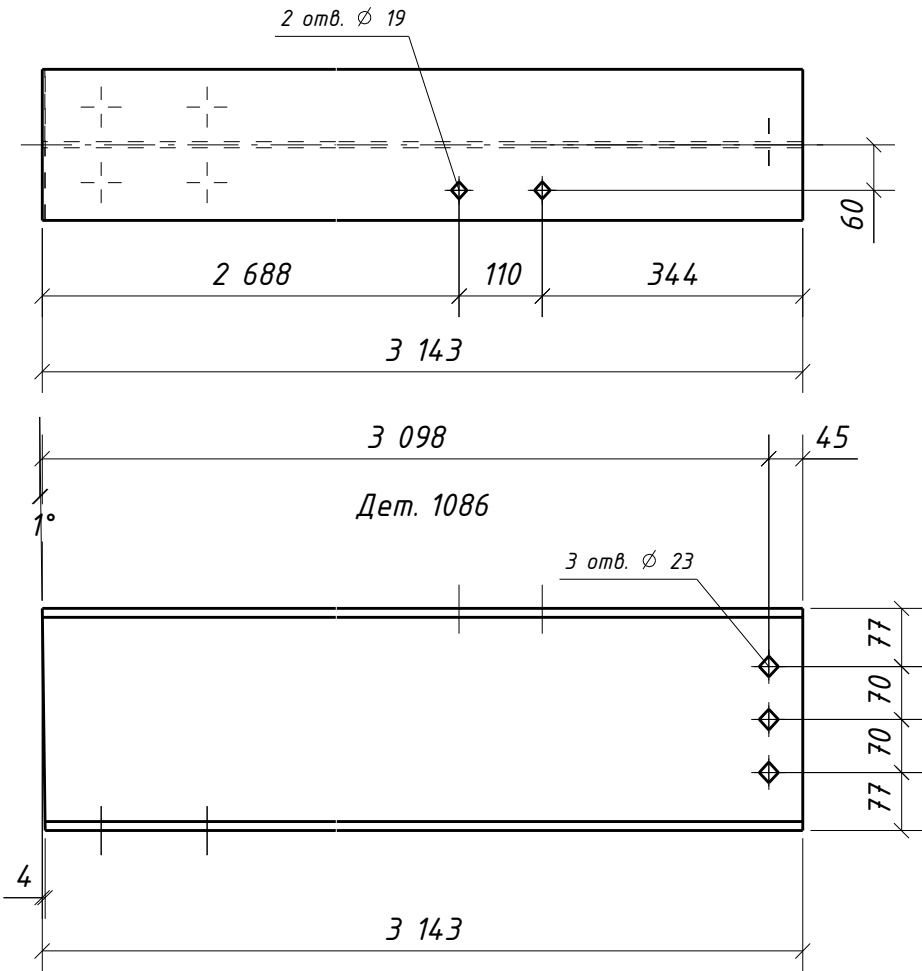

Вид снизу

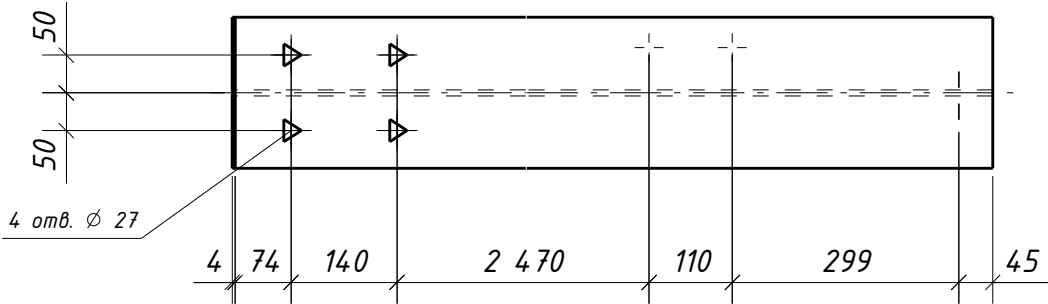

Инв. № подл.	Подп. и дата	Взам. инв. №	Вид снизу Technical drawing of a rectangular plate. The drawing is labeled 'Вид снизу' (View from below). The plate has a total width of 470 and a total height of 140. There are four holes, each with a diameter of 27, arranged in two rows of two. The distance between the centerlines of the holes in the same row is 140. The distance between the centerlines of the holes in the two rows is 74. The distance from the left edge to the centerline of the first hole in the top row is 4. The distance from the right edge to the centerline of the last hole in the top row is 45. The distance from the top edge to the centerline of the top row of holes is 50. The distance from the bottom edge to the centerline of the bottom row of holes is 50. A leader line points to the holes with the text '4 отв. Ø 27'.				
Разраб.	Салтымаков А.С.					1632-2021-2.1.3-КМД4	Дет.
Изм.	Кол.уч.	Лист	№ док.	Подпись	Дата		1086